


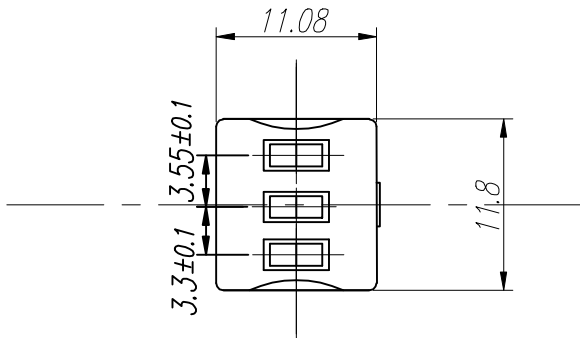


SYM	ECN NO	DATE	APPRVAL
△			



track3
track2
track1

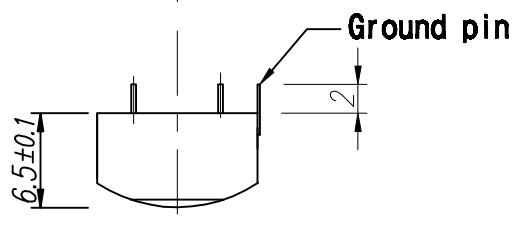

track3
track2
track1

Specification

Inductance	mH	28±30%	1KHz	100 μA
DC Resistance	Ω	140±25%	DC	at 20°
Recording Density	BPI	210		
Tape Speed	IPS	7.5	Measuring Tape	
Read Output	mVp-p	30±25%	PM50-78	
Insulation R	MΩ	50	250V DC	
Core Earth	Ω	100 Max	100 μA	
Gap Length	μm	12.5±6		
Track Width	mm	1.5±0.1		
Head Life	Times	500,000Min		

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETERS
2) TOLERANCES:
.X ± .1
.XX ± .05
ANGLES ± 0°~30'

SCALE $\frac{4}{1}$ MM REV A

CORE MATERIAL: PERMALLOY

MODEL Triple head (6.5)

DWG. NO

3 TRK READ HEAD

JINSUNG DIGITECH

DWG DGN CHK APP

ZHC